


Octopus Unlocker

USER'S GUIDE

Octopus Unlocker User's Guide – Contents

Contents

Octopus Unlocker	3
Installation	2
Before Starting	
Unlocking Procedure	6
Appendix: Installing drivers in detail (for Windows XP)	8

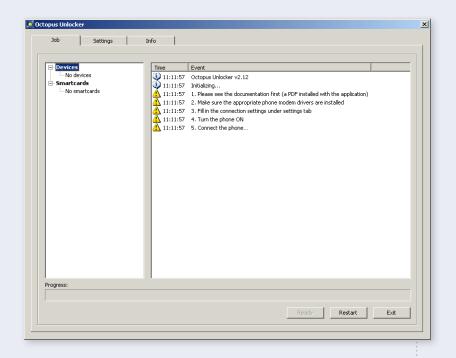

Octopus Unlocker

Octopus Unlocker in an application for **full and permanent unlocking** of almost all Sony Ericsson phones. Octopus Unlocker can also fully **repair** a damaged security zone. The phone must be previously flashed with a correct firmware.

Currently supported platforms:

- PDA DB2000
- PDA DB2001
- DB2012
- DB2020
- DB3150
- PNX5230






Installation

- Run installer OctopusUnlocker_v2.10-installer.exe
- 2. Follow the installation wizard's instructions.

Installation successful.

Before Starting

- 1. You need to find a **Dongle Owner**.
- Ask the Dongle Owner to create you an Octopus Networking account.
- Install USB Flash drivers from C:\Program Files\OctopusUnlocker\Drivers\USB Flash (see Appendix for details).

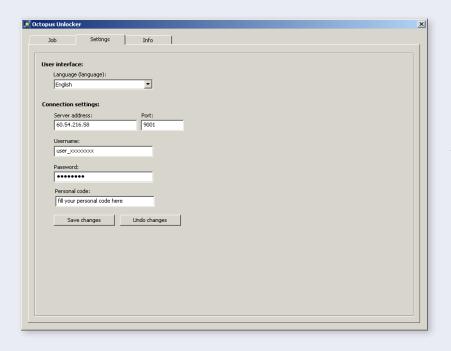

Unlocking Procedure


- 1. Install phone modem drives corresponding to the specific phone. It can be found in Octopus Unlocker install folder (see Appendix for details).
- Run OctopusUnlocker.exe
- 3. Click the **Settings** tab, and fill in the connection data there:

Server data:

- IP address/host name (currently 60.54.216.58)
- port (currently 9001)

Your account data (which you obtained from your reseller):


- user name
- password
- personal code
- 4. Click the **Job** tab, and start the unlock procedure:
- **4.a** in **User mode** (recommended for unlocking a working phone):
 - power on the phone
 - connect the cable without holding any button

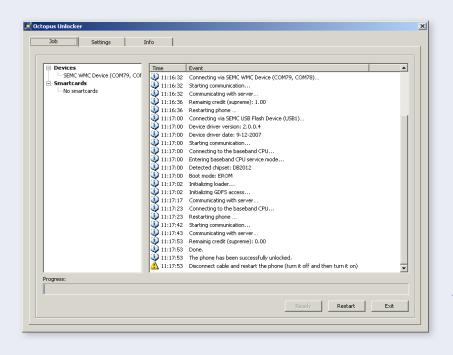

- 4.b in **Repair mode** (recommended only if GDFS security zone is damaged):
 - remove/install baterry on the phone
 - connect the phone while holding 'C' button
 - Important: when the phone restarts and powers on, it's required to reconnect the cable
- Sometimes there might be a lack of server resources, so your operation can be scheduled to specific time and the application asks you to wait. If the period is too long to wait, you can close the application and disconnect the cable and the battery from the phone, and start the procedure again after the wait period elapses.
- 6. Please wait until the unlock procedure finishes.

Unlocking successful.










Appendix: Installing drivers in detail (for Windows XP)


- 1. Installing USB Flash drivers (common for all Sony Ericsson phones)
- · Take any Sony Ericsson phone
- Power it off
- Remove the battery and install it back
- Keep holding 'C' button and connect the usb cable during that
- · When system asks for New hardware installation, choose:
 - "No, not this time" when asking for using Windows Update
 - then choose "Install from a list or specific location (Advanced)"
 - click "Browse" and look for drivers in the path:
 C:\Program Files\OctopusUnlocker\Drivers\USB Flash vX.X.X.X

 * in case you installed the application elsewhere, replace
 "C:\Program Files\OctopusUnlocker" by your install path
 - click "Next" and then "Finish"
- The phone may power on itself after a minute, so when driver installation is finished, disconnect the phone and remove/install its battery









2. Installing phone modem drivers (phone type specific)

For each phone type, do the following:

- Turn a phone on, wait until it starts
- connect a DCU-60 cable to the phone
- When system asks for New hardware installation, choose:
 - "No, not this time" when asking for using Windows Update
 - then choose "Install from a list or specific location (Advanced)"
 - click "Browse" and look for drivers in the following path:

C:\Program Files\OctopusUnlocker\Drivers\A1 A2 Phone Modem Drivers

- click "Next" and then "Finish"
- There are more components, so the system will ask more times. Just repeat the procedure described above